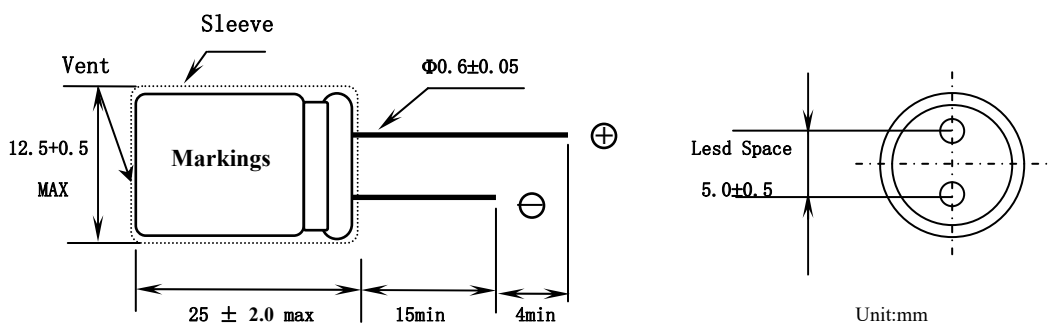


Aluminum Electrolytic Capacitor Specification				
Series		16 V 2200 μ F	Part No.	TNCI-349Z555PK583
Customer No.	/		Case size	Φ D 12.5 X L 25
Specification	Items		Standard	
	Operating temperature range		- 40 ~ + 105 $^{\circ}$ C	
	Capacitance tolerance		$\pm$ 20% (20 $^{\circ}$ C , 120Hz)	
	Dissipation factor (MAX)		(Less than) 0.18 (20 $^{\circ}$ C , 120Hz)	
	Leakage current (MAX)		(Less than) 352 μ A (20 $^{\circ}$ C 16 V 2 min)	
	ESR (MAX)		0.03 Ω (100KHZ, 20 $^{\circ}$ C)	
	Ripple current (MAX)		1945 mArms (100KHz , 105 $^{\circ}$ C)	
	Load life		7000 hrs	
Outline	Sleeving pipe basic		PET	
	(Dimensions)			
	Copper clad steel wire(tinned) 			
Recorder	(The first edition) :2020-3-4			