J-SUCCEED CO. LTD.
TEL: +86 15869110800
E-mail: support@jsucceed.cn

capsonic

Surface Mount Aluminum Electrolytic Capacitor Specification

Series	MRE	10 V 470 μF	Part No.	PUH-343Z704PH323-Y-U
Customer No.	/		Case size	ΦD 6.3 X L 9

Specification	Items	Standard
	Operating temperature range	- 40 ~ + 105 ℃
	Capacitance tolerance	±20% (20℃ ,120Hz)
	Dissipation factor (MAX)	(Less than) 26% (20℃ ,120Hz)
	Leakage current (MAX)	(Less than) 47μA (20℃ 10 V 2 min)
	E S R(MAX)	0.22 Ω (100KHz ,20℃)
	Ripple current (MAX)	600 mArms (100KHz ,105℃)
	Load life	2000 hrs
Outline	Marking color	Blue
	(Dimensions)	

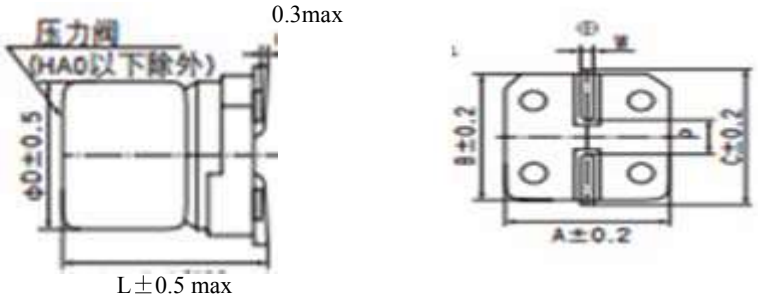

Unit:mm

ΦD	L	A	B	C	W	P±0.2
6.3	9	6.6	6.6	7.2	0.5～0.8	1.9