
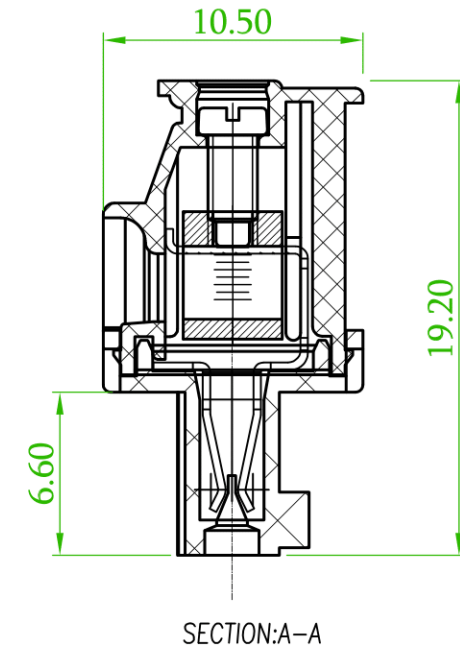
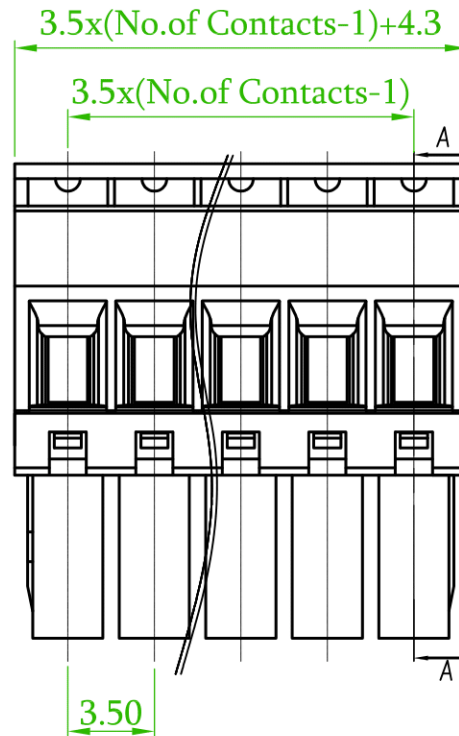


Standard:	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Contact Resistance:	20mΩ	
Insulation Resistance:	500MΩ	
Wire Range:	28~16AWG 1.5mm ²	
Dielectric Voltage:	AC 2000V for one minute	

Torque: 0.2 Nm
Strip Length: 6~7 mm
Temp. Range: -40°C ~ +105°C

Housing: Nylon 66, UL94V-0
Screw: M2.0,Steel,Zn Plated
Clamp: Copper Alloy,Ni Plated
Cage: Copper Alloy,Ni Plated

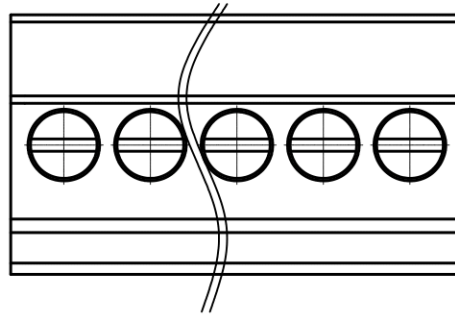

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



TITLE	Terminal Block				Page	1/1
PART NO.	8WS683Q-8NEQAAHIO			DRAWN	2017/08/31	
DRAWING NO.		REV.	A	CHECKED	2017/08/31	
CUSTOMER P/N		SCALE	None	APPROVED	2017/08/31	
TOLERANCE	.X ± 0.38 .XX ± 0.25	UNIT	mm	THIRD ANGLE PROJECTION		