

RoHS compliant




REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED


NOTES:

- 1.Rating:(UL) 300V/10A
(IEC) 250V/10.5A
- 2.Poles:2P-24P
- 3.Insulation Withstands Voltage:AC2000V/1Min
- 4.Contact Resistance:20MΩ
- 5.Insulation Resistance:500MΩ at DC500V
- 6.Using Temperature Range:-40℃~+115℃
- 7.Max Soldering:250℃ for 5S
- 8.With "★" is Import Dimension

2	Solder Pin	N	Brass	Sn Plated
1	HOUSING	1	PA66	UL94V-0

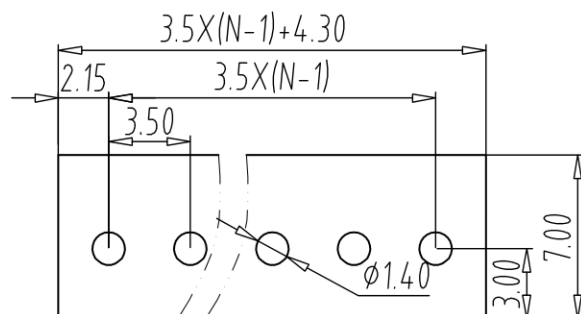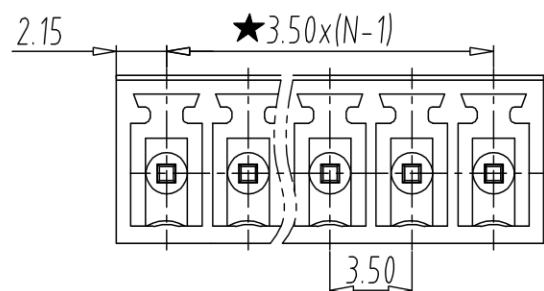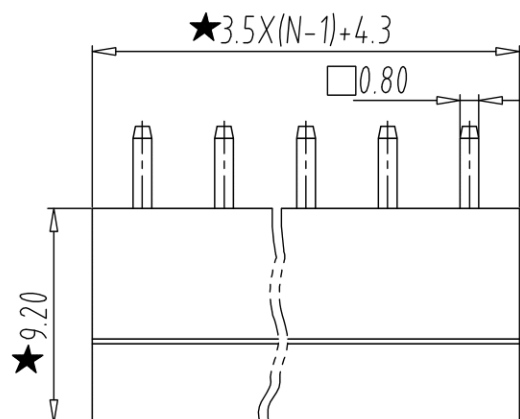

PCB Layout

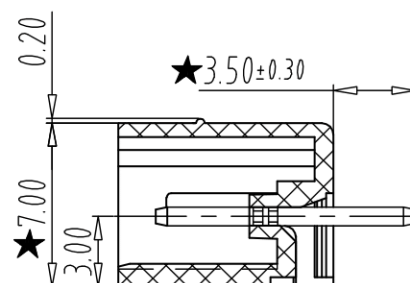

conectonic



TOLERANCE:	PROJECTON		TITLE:			
ANGLE ±1°	DATE		Euro Terminal Block Pitch 3.50mm Series			
X.XX ±0.20	DRAWN	COL	PART NO:			
X.X ±0.30	CHECKED		RT08-4-5-8-5			
X. ±0.50	APPROVED		REV: A	UNIT: mm	SCALE: 2:1	SIZE: A4