

SPECIFICATION

Current Rating: 0.5AMP  
Voltage Current: 5.0V(rms)/DC  
Contact Resistance: 100mΩ Max.  
Insulation resistance: 500MΩ AC for one minute  
Withstanding Voltage: 250VAC  
Operating temperature: -40℃ ~ +85℃


Material

Housing:HI-Temp plastic UL 94V-0  
Contact:Copper Alloy.  
Shell:Stainless Steel SUS 304,t=0.20mm.

ORDER INFORMATION

8NWL P - 08S0 P H O 3 4

P:Push-Push TypeNo. of contactsS0:Selective AuP:With PegH:T/R W/O Cap

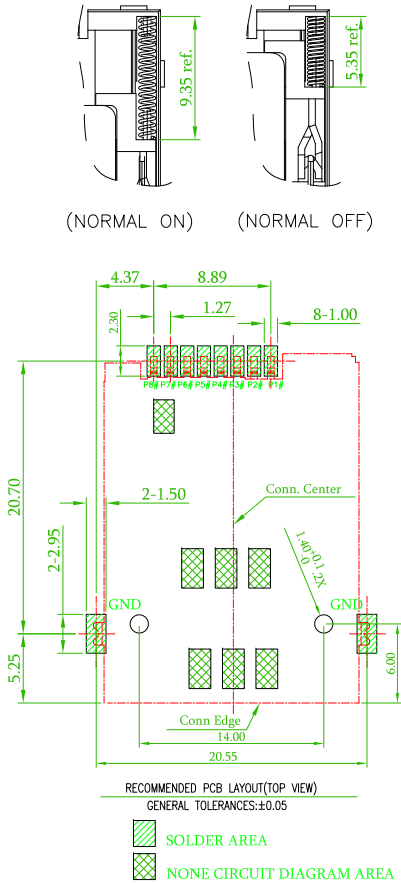

5GND

6VPP



7I/O

1VCC

2RST

3CLK

| PIN NO. | DESCRIPTION |
|---------|-------------|
| P1#     | C1:VCC      |
| P2#     | C5:GND      |
| P3#     | C2:RST      |
| P4#     | C6:VPP      |
| P5#     | C3:CLK      |
| P6#     | C7:I/O      |
| P7#     | POL         |
| P8#     | DET         |

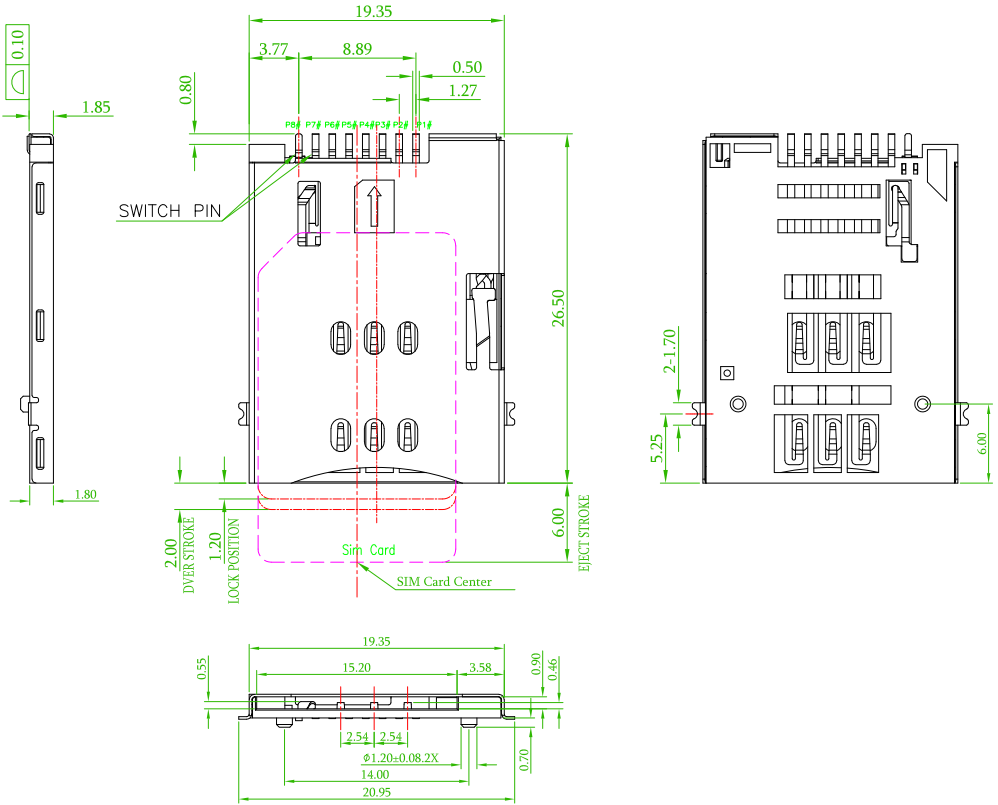

conectonic

J-SUCCEED CO. LTD.  
TEL: +86 15869110800  
E-mail: support@jsucceed.cn

| 品名<br>TITLE          | SIM CARD 8P PUSH PUSH |             |      |                              | 頁數<br>Page  | 1/2                |
|----------------------|-----------------------|-------------|------|------------------------------|-------------|--------------------|
| 品號<br>PART NO.       | 8NWL P-08S0 P H O 3 4 |             |      |                              | 繪圖<br>DRAWN | Nick<br>2019/12/02 |
| 圖號<br>DRAWING NO.    |                       | 版本<br>REV.  | A    | 核對<br>CHECKED                |             | Josh<br>2019/12/02 |
| 客戶品號<br>CUSTOMER P/N |                       | 比例<br>SCALE | None | 承認<br>APPROVED               |             | Josh<br>2019/12/02 |
| 公差<br>TOLERANCE      | .X±0.30<br>.XX±0.20   | 單位<br>UNIT  | mm   | THIRD<br>ANGLE<br>PROJECTION |             |                    |

| REV. | ECN NO. OR DESCRIPTION | REVISED | DATE |
|------|------------------------|---------|------|
|      |                        |         |      |
|      |                        |         |      |
|      |                        |         |      |