
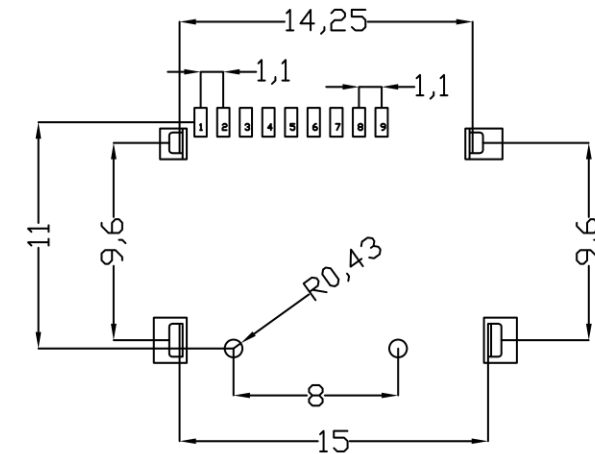


RoHS compliant

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

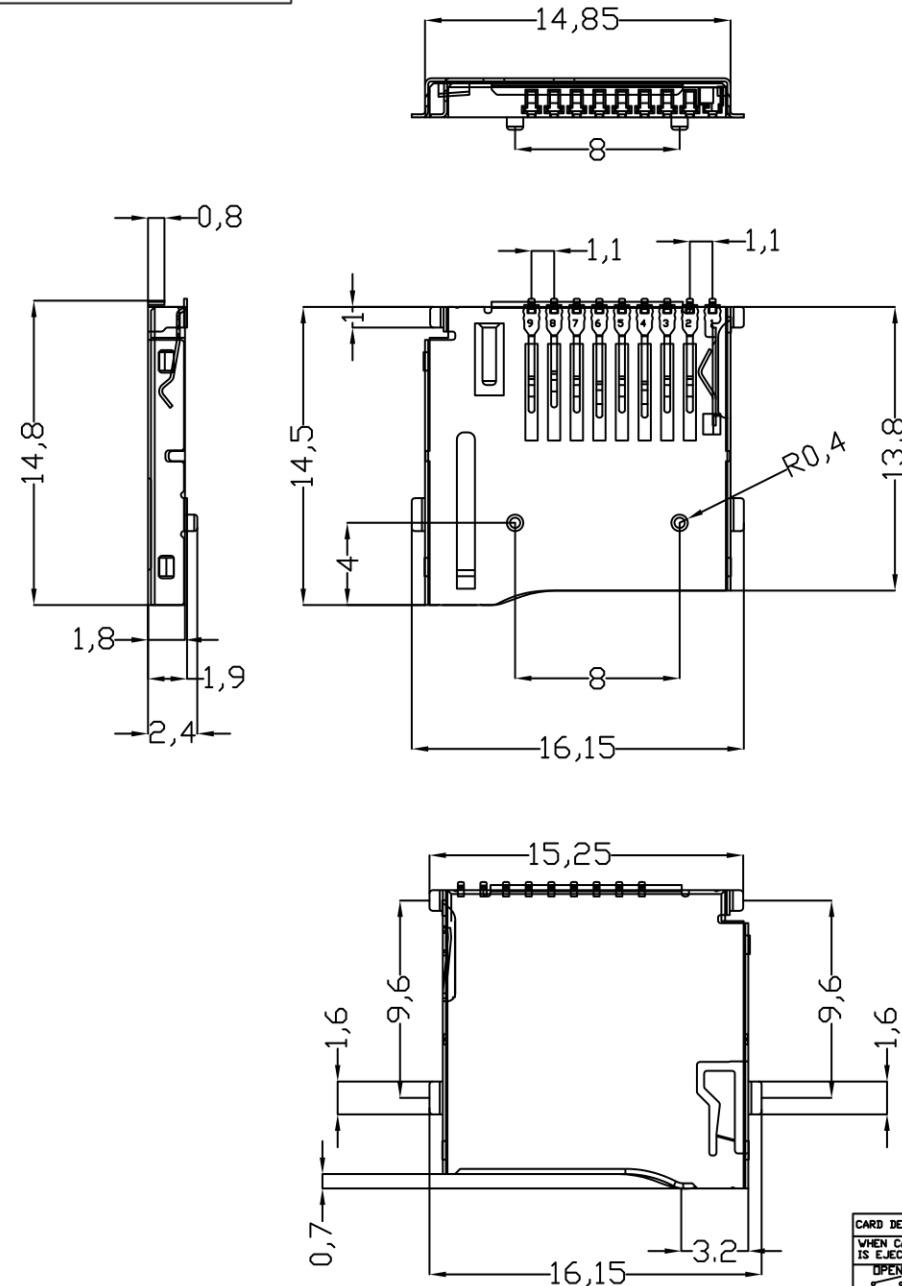

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

NOTE:

1.MATERIAL:

INSULATOR: THERMOPLASTIC UL94V-0.
TERMINAL: COPPER ALLOY T=0.15mm.
SWITCH: COPPER ALLOY T=0.15mm.
SHELL: SUS T=0.15mm.
SWP: SUS 10.00* ϕ 0.20mm.
CRANK AXLE: SUS 304

2.PLATED:

CONTACT: 1 μ GOOD PLATING OVERALL
50 μ NI UNDERPLATED OVERALL.
SHELL: 50 μ NI UNDERPLATED OVERALL.

3.ELECTRICAL PERFORMANCE:

CONTACT RESISTANCE: 100 MILLIOHMS Max.
DIELECTRIC STRENGTH: 500V AC FOR 1 MINUTE.

4.MECHANICAL PERFORMANCE:

CARD INSERT FORCE: 0.5~1.2Kgf
CARD EJECTION FORCE: 0.5~1.2Kgf
CYCLE LIFE: 10000 TIMES.

PIN NUMBER	PIN NUMBER
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
CD	CAED DETECTION
G	GROUND

CARD DETECTION SWITCH	WHEN CARD IS EJECTED	WHEN CARD IS INSERTED
OPEN	CLOSE	CLOSE
CD	G	CD

conectonic 

TOLERANCE:	PROJECTON		TITLE:
ANGLE $\pm 0.5^\circ$	DATE	11-05-12'	T-Flash Connector (Push Type)
X.XXX ± 0.05	DRAWN	LYS	PART NO:
X.XX ± 0.10	CHECKED		
X.X ± 0.15	APPROVED		
		REV: A	UNIT: mm
		SCALE: 2:1	SIZE: A4