

Crystal oscillator



SMD CMOS Output 5.0×3.2×1.2mm 0Q Series

Approved by:	
Checked by :	
Issued by:	

SPECIFICATION

PN: VMN-0Q58333P6F3583D6

Crystal oscillator



SMD CMOS Output 5.0×3.2×1.2mm 0Q Series

FEATURE

- Small SMD seam sealed clock crystal oscillator units.
- High precision characteristic covering up to wide frequency range.
- Designed for automatic mounting and reflow soldering.
- Tri-State function available.
- Supply voltage range : 1.8 V ~ 5.0 V.
- High stability, low jitter, low power consumption.
- Main application : wireless communication set, PC, and LCDM.
- RoHS Compliant / Pb Free.

ELECTRICAL SPECIFICATIONS


Parmeters	Condition\Model	0Q	
Fan Out Type		CMOS	
Supply Voltage		3.3V±10%	
Frequency		25.000MHz	
Operating Temperature		-20°C to +70°C	
Current		20mA max	
Frequency Stability	All Conditions	±50ppm	
Output Voltage	Vol(max)	90%VDD Min	
	VoH(min)	10%VDD Max	
Rise/Fall Time	AT 0.1Vdd~0.9Vdd	8ns max	
Load Capacitance		15pF	
Duty Cycle		50±10%	
Storge Temperature		-55~+125°C	
Start-upTime	Load RANGE	5mSec max	
Aging		±3ppm(1st ,year at 25 °C)	
Tri-State	Output Active	2.31V Min Pin 1 Tri-state	
	Output in High-Impedance	0.99V Max	
PAD Connection		PIN#1 Tri-State/NC	PIN#3 OUT
		PIN#2 GND	PIN#4 Vdd

Crystal oscillator




SMD CMOS Output 5.0×3.2×1.2mm 0Q Series


Dimension (Unit: mm)

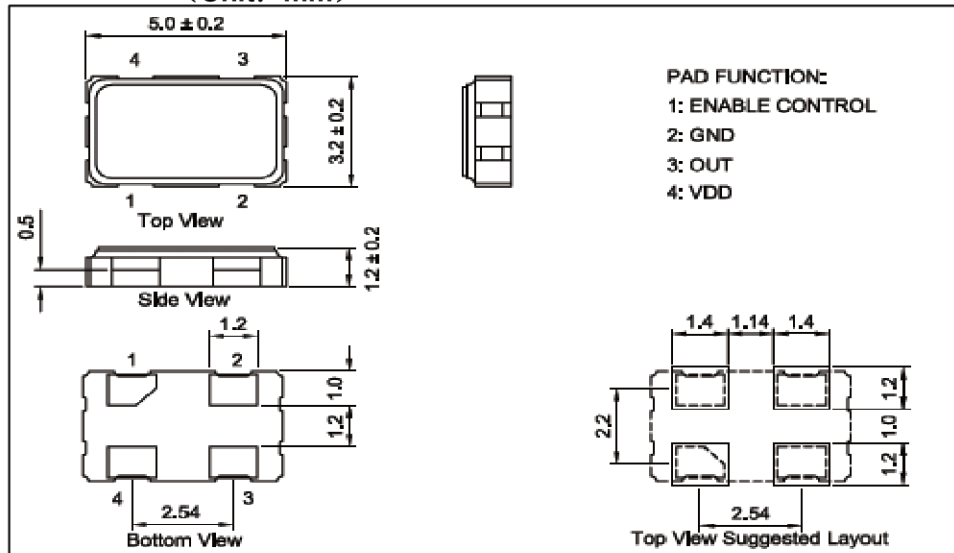

MEASUREMENT CIRCUIT

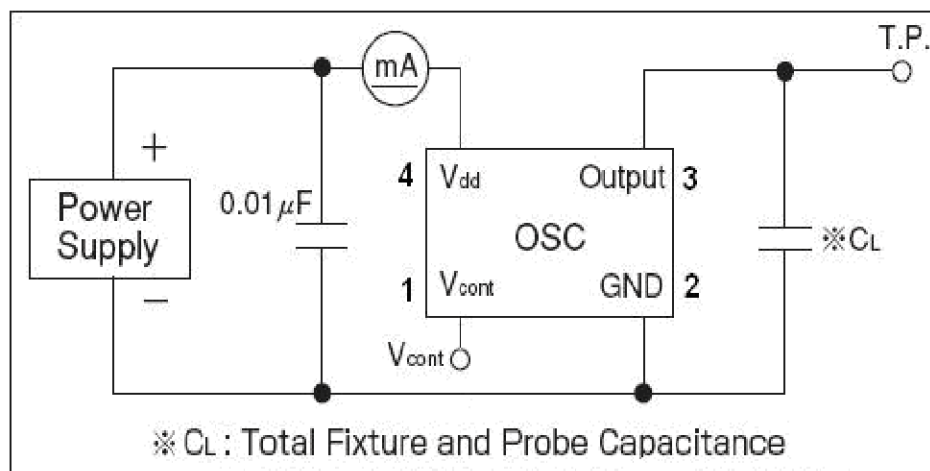


Crystal oscillator


crystalec 

SMD CMOS Output 5.0×3.2×1.2mm 0Q Series

WAVEFORM CONDITIONS

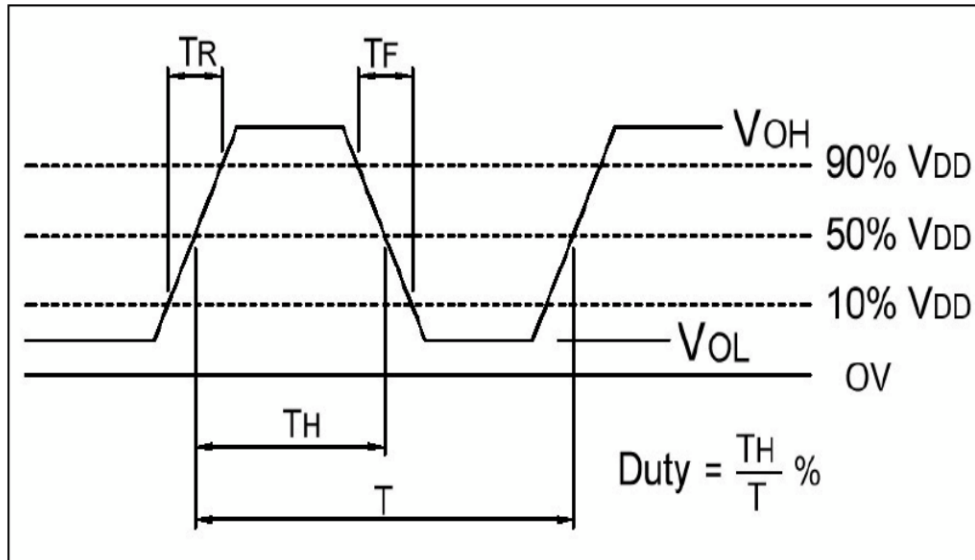

REFLOW CONDITION

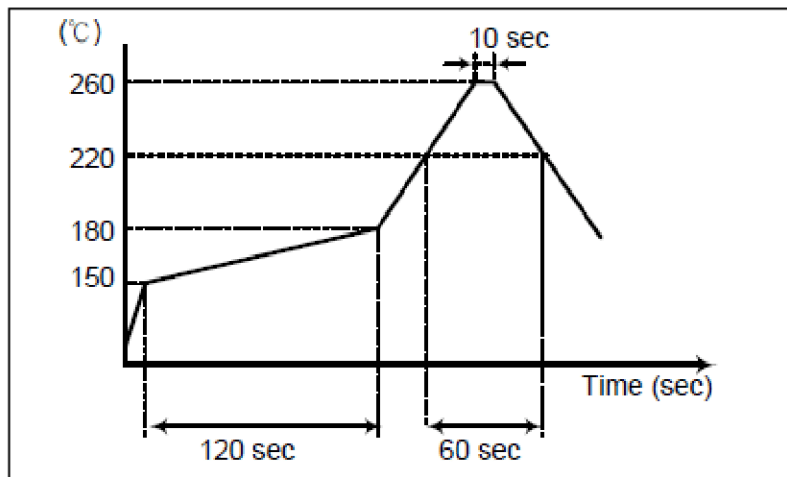


The reflow temperature profile may vary depending on the product model, specifications and frequency range. Refer to the individual product specifications for details

Crystal oscillator


SMD CMOS Output 5.0×3.2×1.2mm 0Q Series

crystalec

CARRIER TYPE

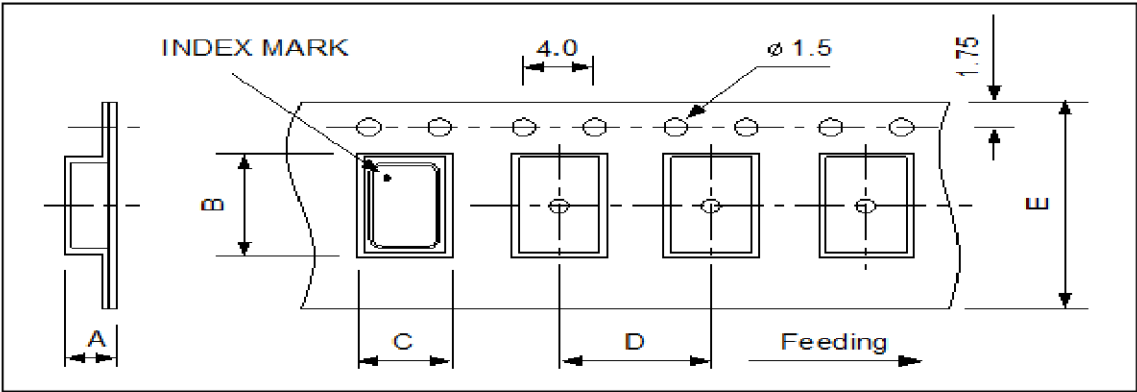

REEL

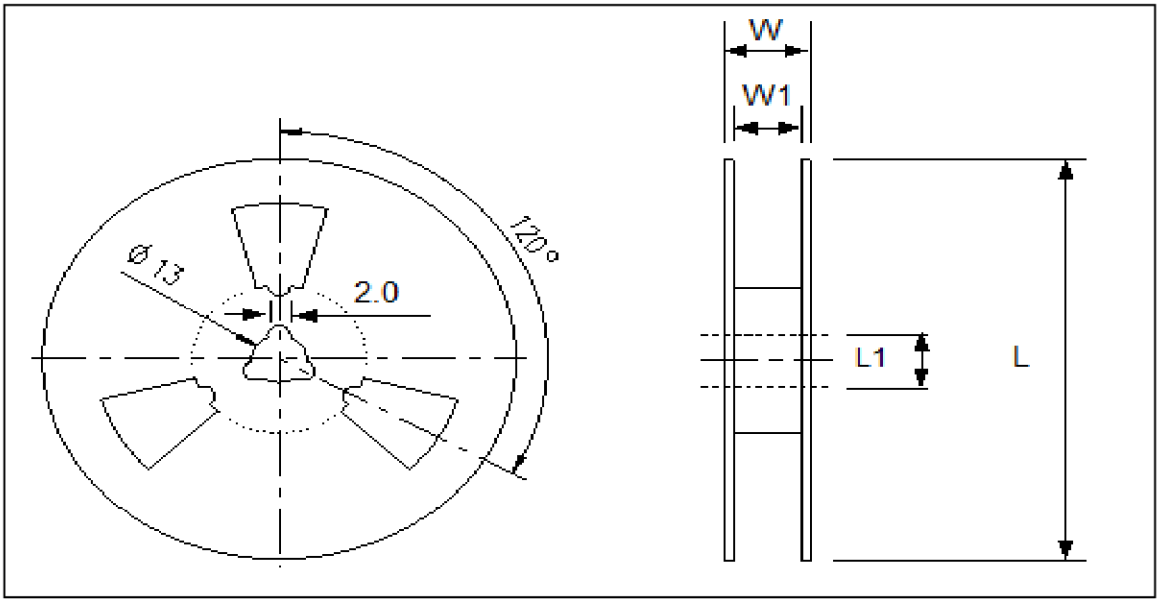

DIMENSIONS		A	B	C	D	E	L	L1	W	W1	pcs / Reel
	7050	2.15	7.9	5.4	8	16	180	13	21.5	17.5	1K
	6035	1.4	6.4	3.9	8	12	180	13	15.4	13	1K
	5032	1.46	5.5	3.6	8	12	180	13	15.4	13	1K
	3225	1.4	3.4	2.7	4	8	180	13	11.5	8	3K
	2520	1.15	2.8	2.25	4	8	180	13	10.5	8	3K
	2016	0.95	2.25	2.25	4	8	180	13	10.5	9	3K
	1612	0.8	2.0	1.85	4	8	180	13	10.5	9	3K

Crystal oscillator



SMD CMOS Output 5.0×3.2×1.2mm 0Q Series

RELIABILITY TEST SPECIFICATIONS

Test item	Equipment	Condition	Specification
1.SOLDERABILITY TEST	RC-328A	1.Solderability:235±5℃, 5±0.5S 2.Heat resistance:260±5℃,10±1S restoration of 1 hour	
2. HERMETICITY TEST	HELIOT-306S	FC-84 FLUOROCARBON,BUBBLE MACHINE	
3. VIBRATION TEST	HG-V4、 S&A 250B	Enable Crystal(10g) from 10-55-10Hz,X、 Y、 Z horizontal,1 Minute vibration/time, 1time/ 2 hours.	
4. MECHANICAL SHOCK	HPC-200、 S&A 250B	Enable Crystal 50G(490m/s2) time=11 ms speed=3.4 m/s half sine wave oscillation	
5. DROP TEST	HARD BOARD.S&A250B	75CM HIGH,3 TIMES ON HARD BOARD	
6. HIGH&LOW TEMP STORAGE TEST(Static test)	H-PTH-80CK & HM101-3ABN, S&A 350B/250B	High temperature: 125℃±2℃,1000hr; Low temperature:-40℃±3℃,1000hrs	
7. TEMP &HUM CYCLING TEST	H-PTH-80CK CHAMBE, S&A 350B/250B	Temperature:-10℃±2℃~ 65℃±2℃,Humidity:93±3%,1 cycle need 24 hrs. 5cycles .	
8. HIGH TEM. & HUM. STORAGE TEST	H-PTH-80CK CHAMBE, S&A350B/250B	Temperature:40℃±2, Humidity:85±3,-2%,Store 96 hrs	
9.AGING TEST	H-PTH-80CK CHAMBE, S&A350B/250	Temperature:40℃±2, Humidity:85±3,-2%,Store 96 hrs	