

WT714H/WT718H


Description

The WT714H and WT718H are a family of half-duplex transceivers that meet the specifications of RS-485 and RS-422 serial protocols with enhanced ESD performance. The ESD tolerance has been improved on these devices to over $\pm 15\text{kV}$ for both Human Body Model and IEC61000-4-2 Air Discharge Method. These devices are pin-to-pin compatible with Lasemic WT714 and WT718 devices as well as popular industry standards. As with the original versions, the WT714H and WT718H feature BiCMOS design allowing low power operation without sacrificing performance. The WT714H and WT718H meet the requirements of the RS-485 and RS-422 protocols up to 10Mbps under load. The WT714H is equipped with a low power shutdown mode.

FEATURES

- 5V only
- Low power BiCMOS
- Driver / receiver enable for multi-drop configurations
- Low power shutdown mode (WT714H)
- Enhanced ESD specifications:
 - $\pm 15\text{kV}$ Human Body Model
 - $\pm 15\text{kV}$ IEC61000-4-2 Air Discharge
 - $\pm 8\text{kV}$ IEC61000-4-2 Contact Discharge
- Available in RoHS compliant, lead free packaging.

Block Diagram

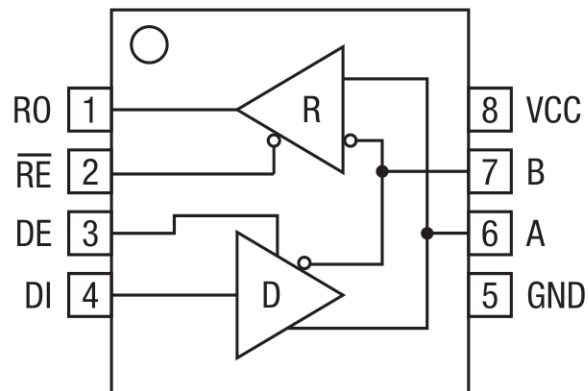

WT714H and WT718H

WT714H/WT718H

Absolute Maximum Ratings

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

V_{CC}7.0V

Input Voltages

Logic -0.3V to ($V_{CC} + 0.5V$)

Drivers.....-0.3V to ($V_{CC} + 0.5V$)

Receivers..... $\pm 15V$

Output Voltages

Logic -0.3V to ($V_{CC} + 0.5V$)

Drivers $\pm 15V$

Receivers.....-0.3V to ($V_{CC} + 0.5V$)

Storage Temperature-65°C to +150°C

Power Dissipation

8-pin NSOIC 550mW

(derate 6.60mW/°C above +70°C)

ESD Ratings

HBM - Human Body Model (A and B pins)..... $\pm 15kV$

HBM - Human Body Model (All other pins)..... $\pm 3kV$

IEC61000-4-2 Air Discharge (A and B pins)..... $\pm 15kV$

IEC61000-4-2 Contact Discharge (A and B pins)..... $\pm 8kV$

Electrical Characteristics

$T_{AMB} = T_{MIN}$ to T_{MAX} and $V_{CC} = 5V \pm 5\%$ unless otherwise noted.

PARAMETERS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
WT714H / WT718H Driver DC Characteristics					
Differential output voltage			V_{CC}	V	Unloaded; $R = \infty \Omega$; Figure 1
Differential output voltage	2		V_{CC}	V	With load; $R = 50 \Omega$ (RS-422); Figure 1
Differential output voltage	1.5		V_{CC}	V	With load; $R = 27 \Omega$ (RS-485); Figure 1
Change in magnitude of driver differential output voltage for complimentary states			0.2	V	$R = 27 \Omega$ or $R = 50 \Omega$; Figure 1
Driver common-mode output voltage			3	V	$R = 27 \Omega$ or $R = 50 \Omega$; Figure 1
Input high voltage	2.0			V	Applies to DE, DI, $\overline{RE}$
Input low voltage			0.8	V	Applies to DE, DI, $\overline{RE}$
Input current			± 10	μA	Applies to DE, DI, $\overline{RE}$
Driver short circuit current $V_{OUT} = HIGH$			± 250	mA	$-7V \leq V_O \leq 12V$
Driver short circuit current $V_{OUT} = LOW$			± 250	mA	$-7V \leq V_O \leq 12V$

WT714H/WT718H

Electrical Characteristics (Continued)


PARAMETERS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
WT714H / WT718H Driver Characteristics AC					
Maximum data rate	10			Mbps	$\overline{\text{RE}} = 5\text{V}$, $\text{DE} = 5\text{V}$; $\text{R}_{\text{DIFF}} = 54\Omega$, $\text{C}_{\text{L1}} = \text{C}_{\text{L2}} = 100\text{pF}$
Driver input to output, t_{PLH}		30	60	ns	See Figures 3 & 5, $\text{R}_{\text{DIFF}} = 54\Omega$, $\text{C}_{\text{L1}} = \text{C}_{\text{L2}} = 100\text{pF}$
Driver input to output, t_{PLH} (WT718HMN ONLY)		30	80	ns	
Driver input to output, t_{PHL}		30	60	ns	See Figures 3 & 5, $\text{R}_{\text{DIFF}} = 54\Omega$, $\text{C}_{\text{L1}} = \text{C}_{\text{L2}} = 100\text{pF}$
Driver input to output, t_{PHL} (WT718HMN ONLY)		30	80	ns	
Driver skew		5	10	ns	See Figures 3 and 5, $t_{\text{SKEW}} = t_{\text{DPHL}} - t_{\text{DPLH}} $
Driver rise or fall time		15	40	ns	From 10%-90%; $\text{R}_{\text{DIFF}} = 54\Omega$, $\text{C}_{\text{L1}} = \text{C}_{\text{L2}} = 100\text{pF}$; See Figures 3 and 6
Driver enable to output high		40	70	ns	$\text{C}_{\text{L}} = 100\text{pF}$, See Figures 4 and 6, S_2 closed
Driver enable to output low		40	70	ns	$\text{C}_{\text{L}} = 100\text{pF}$, See Figures 4 and 6, S_1 closed
Driver disable time from high		40	70	ns	$\text{C}_{\text{L}} = 100\text{pF}$, See Figures 4 and 6, S_2 closed
Driver disable time from low		40	70	ns	$\text{C}_{\text{L}} = 100\text{pF}$, See Figures 4 and 6, S_1 closed
WT714H / WT718H Receiver Characteristics DC					
Differential input threshold	-0.2		0.2	Volts	$-7\text{V} \leq \text{V}_{\text{CM}} \leq 12\text{V}$
Differential input threshold (WT718HMN ONLY)	-0.4		0.4	Volts	$-7\text{V} \leq \text{V}_{\text{CM}} \leq 12\text{V}$
Input hysteresis		20		mV	$\text{V}_{\text{CM}} = 0\text{V}$
Output voltage high	3.5			Volts	$\text{V}_{\text{ID}} = 200\text{mV}$, $\text{I}_{\text{O}} = -4\text{mA}$
Output voltage low			0.4	Volts	$\text{V}_{\text{ID}} = 200\text{mV}$, $\text{I}_{\text{O}} = 4\text{mA}$
Three-state (high impedance) output current			± 1	μA	$0.4\text{V} \leq \text{V}_{\text{O}} \leq 2.4\text{V}$; $\overline{\text{RE}} = 5\text{V}$
Input resistance	12	15		k Ω	$-7\text{V} \leq \text{V}_{\text{CM}} \leq 12\text{V}$
Input current (A, B); $\text{V}_{\text{IN}} = 12\text{V}$			1.0	mA	$\text{DE} = 0\text{V}$, $\text{V}_{\text{CC}} = 0\text{V}$ or 5.25V , $\text{V}_{\text{IN}} = 12\text{V}$
Input current (A, B); $\text{V}_{\text{IN}} = -7\text{V}$			-0.8	mA	$\text{DE} = 0\text{V}$, $\text{V}_{\text{CC}} = 0\text{V}$ or 5.25V , $\text{V}_{\text{IN}} = -7\text{V}$
Short circuit current	7		95	mA	$0\text{V} \leq \text{V}_{\text{O}} \leq \text{V}_{\text{CC}}$
WT714H / WT718H Receiver Characteristics AC					
Maximum data rate	10			Mbps	$\overline{\text{RE}} = 0\text{V}$, $\text{DE} = 0\text{V}$
Receiver input to output	20	45	100	ns	t_{PLH} ; See Figures 3 & 7, $\text{R}_{\text{DIFF}} = 54\Omega$, $\text{C}_{\text{L1}} = \text{C}_{\text{L2}} = 100\text{pF}$
Receiver input to output	20	45	100	ns	t_{PHL} ; See Figures 3 & 7, $\text{R}_{\text{DIFF}} = 54\Omega$, $\text{C}_{\text{L1}} = \text{C}_{\text{L2}} = 100\text{pF}$
Differential receiver skew $ t_{\text{PHL}} - t_{\text{PLH}} $		13		ns	$\text{R}_{\text{DIFF}} = 54\Omega$, $\text{C}_{\text{L1}} = \text{C}_{\text{L2}} = 100\text{pF}$, See Figures 3 and 7
Receiver enable to output low		45	70	ns	$\text{C}_{\text{RL}} = 15\text{pF}$, Figures 2 & 8; S_1 Closed
Receiver enable to output high		45	70	ns	$\text{C}_{\text{RL}} = 15\text{pF}$, Figures 2 & 8; S_2 Closed
Receiver Disable from low		45	70	ns	$\text{C}_{\text{RL}} = 15\text{pF}$, Figures 2 & 8; S_1 Closed
Receiver Disable from high		45	70	ns	$\text{C}_{\text{RL}} = 15\text{pF}$, Figures 2 & 8; S_2 Closed

WT714H/WT718H

Electrical Characteristics, Continued

PARAMETERS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
WT714H Shutdown Timing					
Time to shutdown	50	200	600	ns	$\overline{RE} = 5V, DE = 0V$
Driver enable from shutdown to output high		40	100	ns	$C_L = 100pF$; See Figures 4 and 6; S_2 Closed
Driver enable from shutdown to output low		40	100	ns	$C_L = 100pF$; See Figures 4 and 6; S_1 Closed
Receiver enable from shutdown to output high		300	1000	ns	$C_L = 15pF$; See Figures 2 and 8; S_2 Closed
Receiver enable from shutdown to output low		300	1000	ns	$C_L = 15pF$; See Figures 2 and 8; S_1 Closed
Power Requirements					
Supply voltage V_{CC}	4.75		5.25	Volts	
Supply current					
No load		900		μA	$\overline{RE}, DI = 0V$ or V_{CC} ; $DE = V_{CC}$
		600		μA	$\overline{RE} = 0V, DI = 0V$ or $5V$; $DE = 0V$
Shutdown mode (WT714H)			10	μA	$DE = 0V, \overline{RE} = V_{CC}$
Environmental and Mechanical					
Operating Temperature					
Commercial ($_C$)	0		70	$^{\circ}C$	
Industrial ($_H$)	-40		85	$^{\circ}C$	
($_M$)	-40		125	$^{\circ}C$	
Storage Temperature	-65		150	$^{\circ}C$	
Package					
NSOIC ($_N$)					

Pin Functions

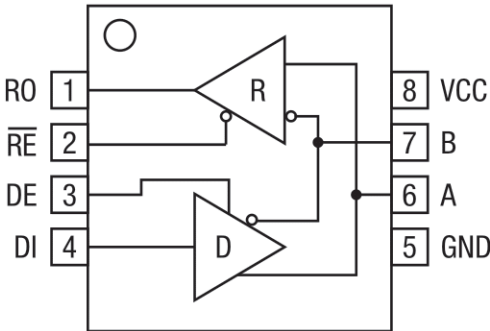

WT714H and
WT718H Pinout
(TopView)

Pin Number	Pin Name	Description
1	RO	Receiver output
2	$\overline{RE}$	Receiver output enable active LOW
3	DE	Driver output enable active HIGH
4	DI	Driver input
5	GND	Ground connection
6	A	Non-inverting driver output / receiver input
7	B	Inverting driver output / receiver input
8	VCC	Positive supply $4.75V \leq V_{CC} \leq 5.25V$

WT714H/WT718H

Test Circuits




Figure 1: RS-485 Driver DC Test Load Circuit

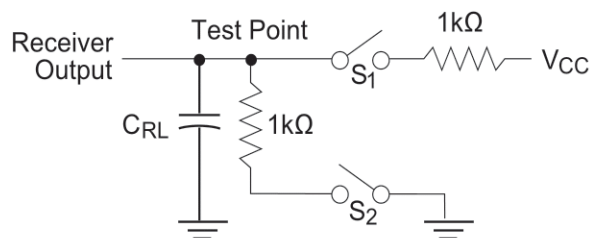


Figure 2: Receiver Timing Test Load Circuit

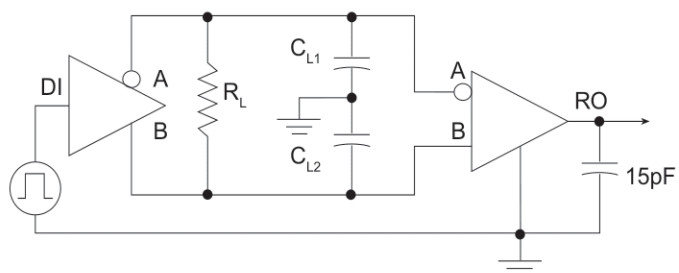


Figure 3: RS-485 Driver/Receiver Timing Test Circuit

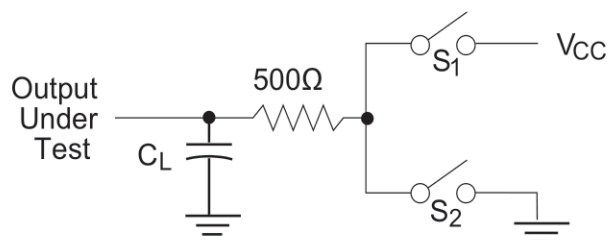


Figure 4: Driver Timing Test Load #2 Circuit

Switching Waveforms

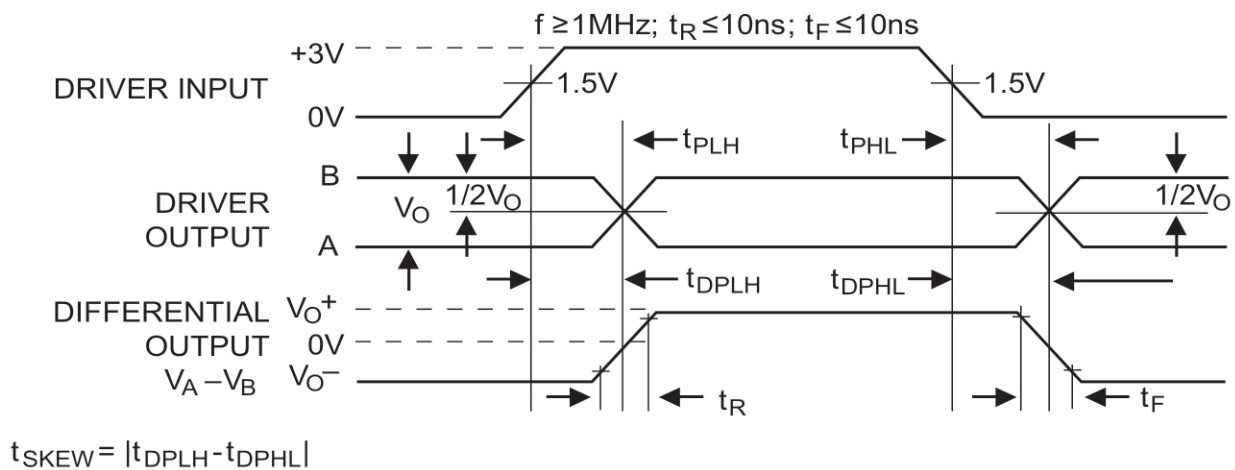


Figure 5: Driver Propagation Delays

WT714H/WT718H

Switching Waveforms (Continued)

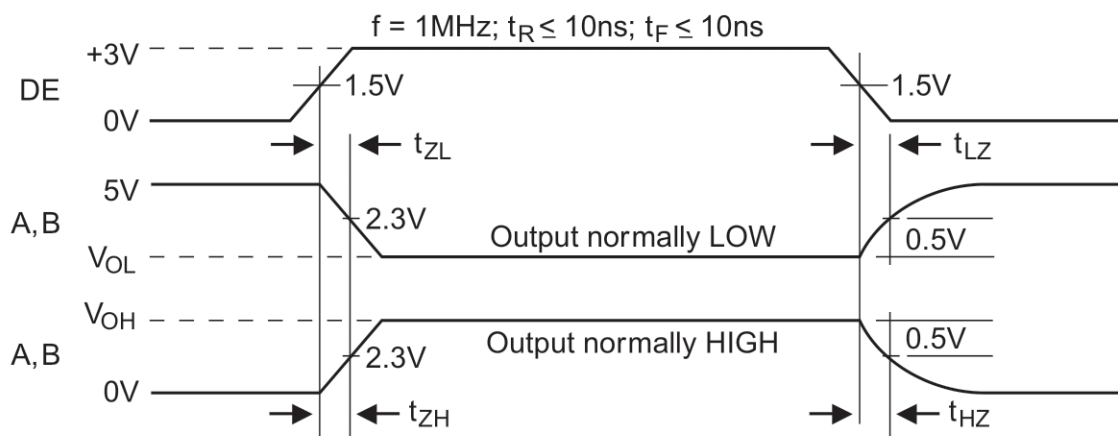


Figure 6: Driver Enable and Disable Times

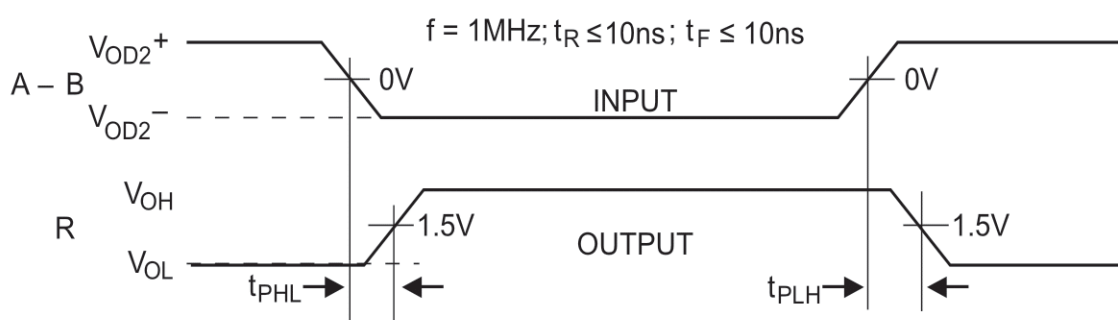


Figure 7: Receiver Propagation Delays

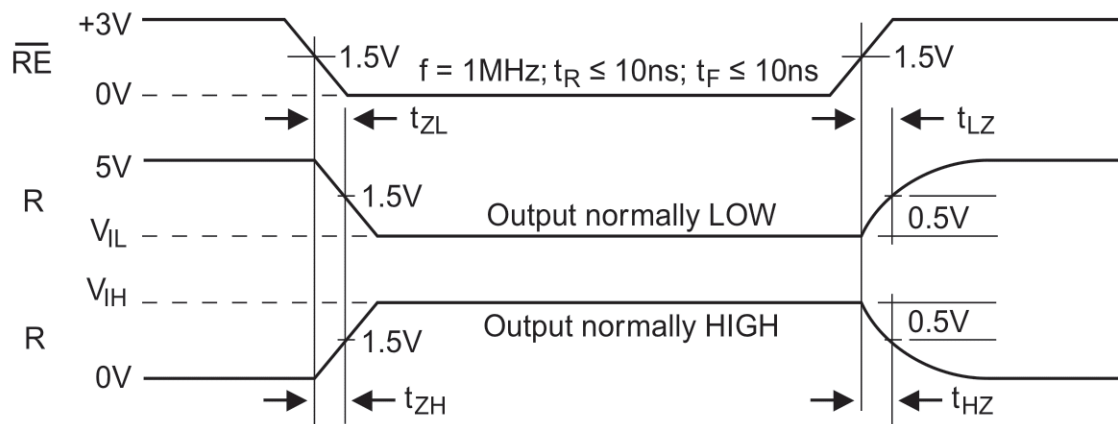


Figure 8: Receiver Enable and Disable Times

WT714H/WT718H

Description

The WT714H and WT718H are half-duplex differential

transceivers that meet the requirements of RS-485 and RS-422. Fabricated with an BiCMOS process, this product requires a fraction of the power of older bipolar designs.

The RS-485 standard is ideal for multi-drop applications and for long-distance interfaces. RS-485 allows up to 32 drivers and 32 receivers to be connected to a data bus, making it an ideal choice for multi-drop applications. Since the cabling can be as long as 4,000 feet, RS-485 transceivers are equipped with a wide (-7V to 12V) common mode range to accommodate ground potential differences. Because RS-485 is a differential interface, data is virtually immune to noise in the transmission line.

Drivers

The driver outputs of the WT714H and WT718H are differential outputs meeting the RS-485 and RS-422 standards. The typical voltage output swing with no load will be 0 Volts to 5 Volts. With worst case loading of 54Ω across the differential outputs, the drivers can maintain greater than 1.5V voltage levels. The drivers of the WT714H and WT718H have an enable control line which is active HIGH. A logic HIGH on DE (pin 3) will enable the differential driver outputs. A logic LOW on the DE (pin 3) will tri-state the driver outputs. The transmitters of the WT714H and WT718H will operate up to at least 10Mbps.

Receivers

The WT714H and WT718H receivers have differential

inputs with an input sensitivity as low as ±200mV. Input impedance of the receivers is typically 15kΩ (12kΩ minimum). A wide common mode range of -7V to +12V allows for large ground potential differences between systems. The receivers of the WT714H and WT718H have a tri-state enable control pin. A logic LOW on RE (pin 2) will enable the receiver, a logic HIGH on RE (pin 2) will disable the receiver. The receiver for the WT714H and WT718H will operate up to at least 10Mbps. The receiver for each of the two devices is equipped with the fail-safe feature. Fail-safe guarantees that the receiver output will be in a HIGH state when the input is left unconnected.

Shutdown Mode

The WT714H is equipped with a Shutdown mode. To enable the shutdown state, both driver and receiver must be disabled simultaneously. A logic LOW on DE (pin 3) and a Logic HIGH on RE (pin 2) will put the WT714H into Shutdown mode. In Shutdown, supply current will drop to typically 1μA.

INPUTS			OUTPUTS	
RE	DE	DI	LINE CONDITION	A B
X	1	1	No Fault	1 0
X	1	0	No Fault	0 1
X	0	X	X	Z Z
X	1	X	Fault	Z Z

Table 1: Transmit Function Truth Table

INPUTS		OUTPUTS	
RE	DE	A - B	R
0	0	0.2V	1
0	0	-0.2V	0
0	0	Inputs Open	1
1	0	X	Z



Table 2: Receive Function Truth Table

WT714H/WT718H


Mechanical Dimensions

NSOIC8

Top View

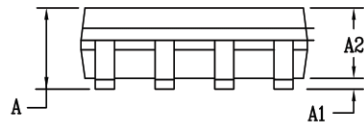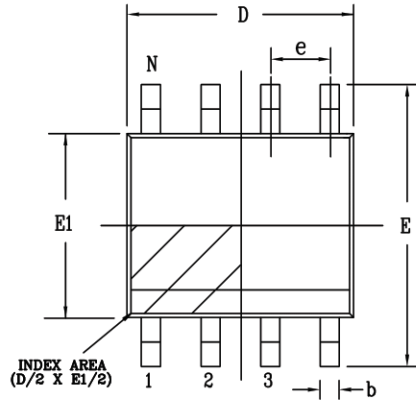

Side View

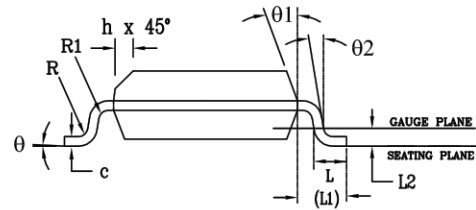

Front View

PACKAGE OUTLINE NSOIC .150" BODY JEDEC MS-012 VARIATION AA						
SYMBOLS	COMMON DIMENSIONS IN MM (Control Unit)			COMMON DIMENSIONS IN INCH (Reference Unit)		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35	—	1.75	0.053	—	0.069
A1	0.10	—	0.25	0.004	—	0.010
A2	1.25	—	1.65	0.049	—	0.065
b	0.31	—	0.51	0.012	—	0.020
c	0.17	—	0.25	0.007	—	0.010
E	6.00 BSC			0.236 BSC		
E1	3.90 BSC			0.154 BSC		
e	1.27 BSC			0.050 BSC		
h	0.25	—	0.50	0.010	—	0.020
L	0.40	—	1.27	0.016	—	0.050
L1	1.04 REF			0.041 REF		
L2	0.25 BSC			0.010 BSC		
R	0.07	—	—	0.003	—	—
R1	0.07	—	—	0.003	—	—
q	0°	—	8°	0°	—	8°
q1	5°	—	15°	5°	—	15°
q2	0°	—	—	0°	—	—
D	4.90 BSC			0.193 BSC		
N	8					

Drawing No: POD-00000108

Revision: A

WT714H/WT718H

Ordering Information⁽¹⁾

Part Number	Operating Temperature Range	Lead-Free	Package	Packaging Method
WT718HHR-O	-40°C to 85°C	Yes ⁽²⁾	8-pin NSOIC	Tube
				Reel